




PLC-422M-AI-IR4/PR
Bullet 2 MP Smart AI Camera

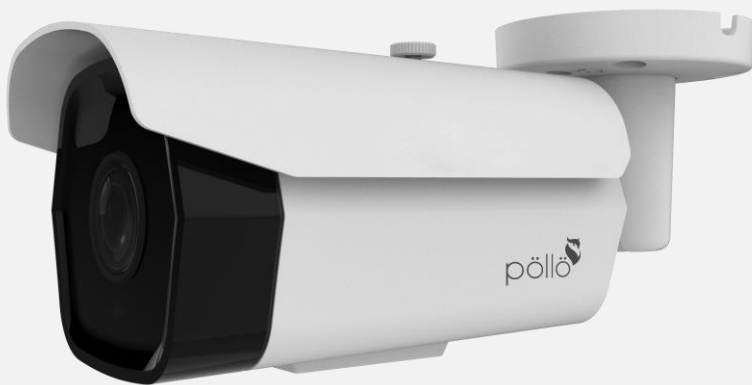

Pollo Pty Ltd.

Address: Suite 401, 55 Phillips St. Parramatta, NSW 2150

Phone: 1300 6600 368

Email: info@pollo.net.au

Website: www.pollo.net.au



PLC-422M-AI-IR4/PR

Bullet 2 MP Smart AI Camera



Specifications:

| | |
|--------------------------------|---|
| Model No. | PLC-422M-AI-IR4/PR |
| Image Sensor | 1/2.8" SONY Starvis Back-illuminated CMOS Sensor |
| Resolution | 2 MP 1080p |
| Effective Pixels | 1945 (H) * 1097 (V) |
| Compression | H.264/H.264+/H.265/H.265+/JPEG/AVI /MJPEG |
| TV System | PAL/NTSC |
| Electronic Shutter Time | Auto: PAL 1/25 s - 1/10000 s; NTSC 1/25 s - 1/10000 s |
| Minimum Illumination | 0.002 Lux |
| S/N Ratio | ≥52 dB |
| Scanning System | Progressive |
| Video Output | Network |
| Reset Button | Optional |
| Focal Length | 6 mm |
| Focus Control | Fixed |
| Lens Type | Fixed |
| Pixels | 3 MP |
| Infrared LED | 42 μ x 4 pcs |
| Infrared Distance | 40 m |
| IR Status | Auto-control |
| IR Power On | Auto-control |
| Ethernet | RJ-45 (10/100 Base - T) |
| Protocol | TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, NTP, SMTP |
| ONVIF | Supports ONVIF 2.4 |
| P2P | Yes, Supports QR Code |
| PoE | Internal, Supports IEEE 802.3af |
| Video Delay | 0.3 s (Within the Lane) |
| Main Stream 1 | 2304 * 1296 @ 20 fps |
| Main Stream 2 | 1920 * 1080 @ 30 fps |
| Main Stream 3 | 1280 * 720 @ 30 fps |
| Sub-stream 1 | 720 * 480 @ 20 fps 720 * 480 @ 30 fps |

| | |
|------------------------------|--|
| Tri-stream | 352 * 288 @ 20 fps 352 * 288 @ 30 fps |
| IE Brower | IE8 - 11, Google Chrome (Lower Than Ver44), Firefox (Lower Than Ver53), Mac Safari (Lower Than Version 12) |
| Smart Phone | iPhone, iPad, Android, Android Pad |
| Intelligent Analysis | Intrusion Detection, Line Cross Detection, Loiter Detection, People Gather Detection |
| Recognition | Face Detection and Recognition (Max. Support 2000 Faces) |
| Day/Night | Color/ B&W (IR-CUT) |
| Image Configuration | Saturation/Brightness/Contrast /Sharpness, Mirror, 3 DNR, White Balance, FLK (Flicker Control), Video Tampering, ROI |
| Defog Mode | Yes |
| ROI | Yes |
| BLC | Yes |
| WDR | WDR: 96 dB |
| Motion Detection | Yes |
| Privacy Masking | 3 Rectangular Zones |
| Recording Mode | NVR/CMS/Web |
| Language | Chinese Simplified, Chinese Traditional, English, Bulgarian, Polish, Farsi, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Dutch, Czech, Vietnamese |
| Audio | Optional |
| SD Card Slot | Optional, Supports Max. 512 GB |
| Housing | Metal, IP67 |
| Anti-cut Bracket | Optional |
| IR Cut Filter | Yes |
| Operation Temperature | -20°C - +60°C RH 95% Max. |
| Storage Temperature | -20°C - +60°C RH 95% Max. |
| Power Source | DC 12 V ± 10%, 950 mA |
| Dimensions | 179 mm (W) mm x 94 mm (H) x 93 mm (D) |
| Weight | 1100 g |

Dimensions:

