




PLG-5316

Swing Turnstile

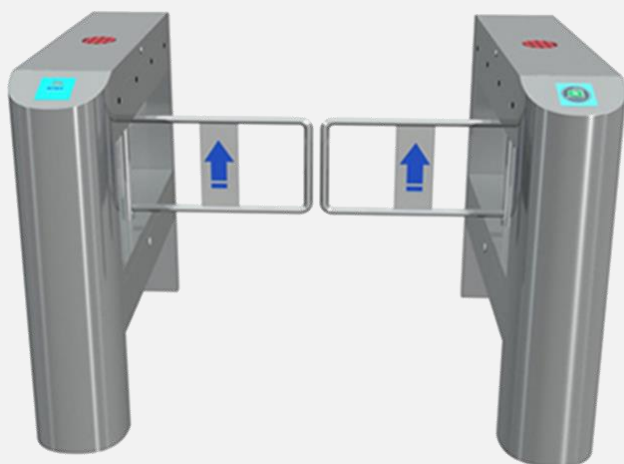

Pollo Pty Ltd.

Address: Suite 401, 55 Phillips St. Parramatta, NSW 2150

Phone: 1300 6600 368


Email: info@pollo.net.au

Website: www.pollo.net.au



PLG-5316

Swing Turnstile

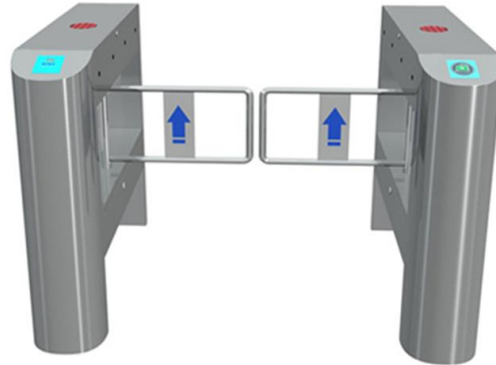

1. Features

- ❖ The gate has a spacious and compact simple design.
- ❖ The gate comes with a fail-safe feature. In case of power failure, the arm will drop down for free access.
- ❖ The gate prevents unauthorized entry and notifies authorities with the help of an alarm. Unauthorized entries like tailgating and passback are also prevented by the device.
- ❖ There is a self-check and alarm feature in the device. The device conducts a self-check when powered on.
- ❖ The device is dustproof, waterproof and is operable under harsh environment.
- ❖ The device contains a special lock to prevent tampering with it.
- ❖ The gate comes with an arrow-directional display and pedestrian counting system.

2. Specifications:

Model	PLG-5316 (Motorcycle Automatic Swing Gate Swing Turnstile)
Body Material	304 Stainless Steel Material
Size	980 * 300 * 1000 (mm)
Working Voltage	AC 220 V ± 10 V, 50 Hz
Control Type	IC/ID/Barcode Control
Rated Power	80 W
Working Mode	Unidirectional or Bidirectional
Working Temperature	-30°C - +70°C
Operating Humidity	≤90% Non-condensing
Operation Life	≥3 Million Times
Passing Speed	40 - 50 Persons/Minute
Open Style	Retractable
Swing Arm Length	≤570 mm
Passage Width	≤1100 mm
Protection Grade	IP44
Drive Motor	DC Brushed/Brushless Motor (24 V)
Operating Time	0.8 s
MCBF	3,000,000/5,000,000 Cycles
Working Environment	Indoor