




Product Guide 2020

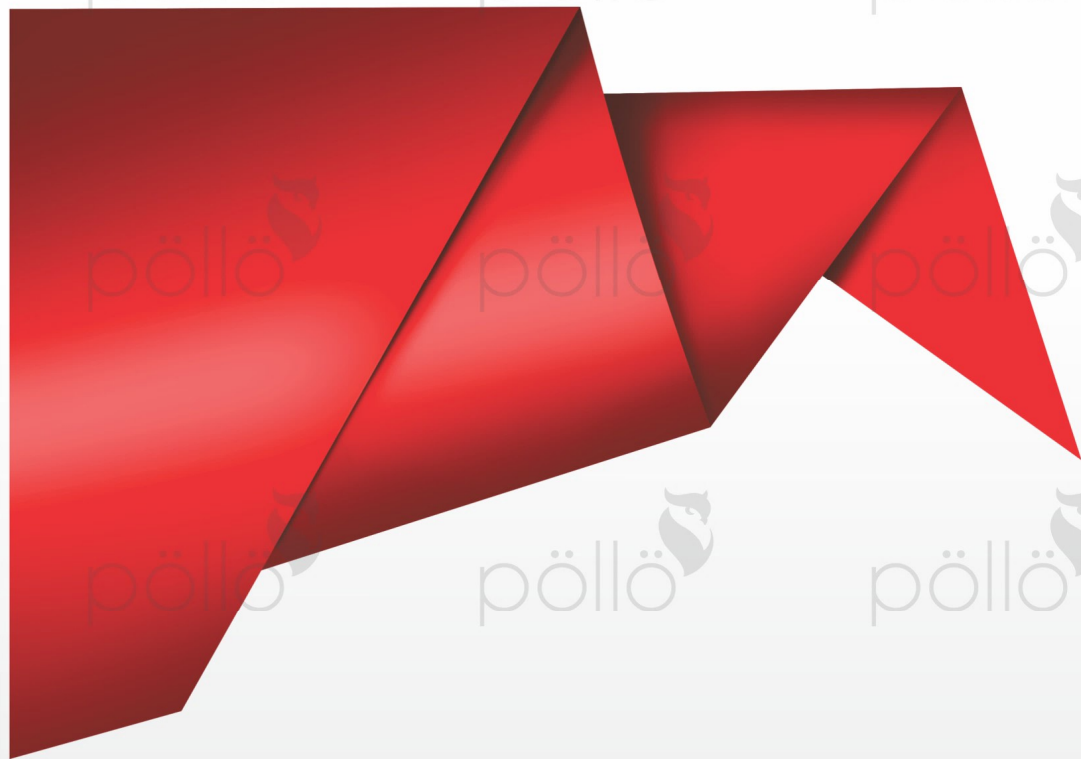

AI Cameras

Pro Series

PLC-425M-AI-IR4/PR (5MP AI)



- 1/2.8" CMOS Sensor
- H.265/H.264+/H.264
- 40m IR
- PoE, SD Card Slot
- 6mm Lens
- 5000 Faces
- IP67

PLC-425M-AI-IR3/PR (5MP AI)



- 1/2.8" CMOS Sensor
- H.265/H.264+/H.264
- 30m IR
- PoE, SD Card Slot
- 3.6mm Lens
- 5000 Faces
- IP67

PLC-435M-AI-IR3/PR (5MP AI)



- 1/2.8" CMOS Sensor
- H.265/H.264+/H.264
- 30m IR
- PoE, SD Card Slot
- 3.6mm Lens
- 5000 Faces
- IP67

PLC-422M-AI-IR4/PR (2MP AI)



- 1/2.8" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- 40m IR
- PoE, SD Card Slot
- 6mm Lens
- 5000 Faces
- IP67

PLC-422M-AI-IR3/PR (2MP AI)



- 1/2.8" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- 30m IR
- PoE, SD Card Slot
- 3.6 mm Lens
- 5000 Faces
- IP67

PLC-432M-AI-IR2/PR (2MP AI)



- 1/2.8" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- 20m IR
- PoE, SD Card Slot
- 2.8 mm Lens
- 5000 Faces
- IP67

PTZ Cameras

Pro Series

PLC-9536-IR25/PR (5MP)



- 1/2.8" CMOS Sensor
- H.265/H.264
- 36X Optical Zoom
- 250m IR
- IP67

PLC-9525-IR18/PR (5MP)



- 1/2.8" CMOS Sensor
- H.265/H.264
- 25X Optical Zoom
- 180m IR
- IP67

PLC-9520-IR20/PR (5MP)



- 1/2.8" CMOS Sensor
- H.265/H.264
- 20X Optical Zoom
- 200m IR
- IP67

PLC-9225-IR18/PR (2MP)



- 1/2.8" CMOS Sensor
- H.265/H.264
- 25X Optical Zoom
- 180m IR
- IP67

PLC-9236-IR25/PR (2MP)



- 1/2.8" CMOS Sensor
- H.265/H.264
- 36X Optical Zoom
- 250m IR
- IP67

PLC-954-IR4/PR (5MP)



- 1/2.8" CMOS Sensor
- H.265/H.264
- 4X Optical Zoom
- 40m IR
- IP67

PLC-924-IR5/PR (2MP)



- 1/2.9" CMOS Sensor
- H.265/H.264
- 4X Optical Zoom
- 50m IR
- IP67

PLC-PTC95/PR (PTZ Controller)



- ONVIF 2.4 Compatible
- 5" Colorful LED Display
- Plug and Play
- 3D Joystick
- Supports USB and HD Port Output

IP Cameras

Classic Series

PLC-425M-VF-IR5 (5MP)



- 1/2.5" Full HD CMOS Sensor
- H.265/H.264
- 2.8 mm - 12 mm
- 50m IR
- IP66

PLC-425M-IR3 (5MP)



- 1/2.5" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 30m IR
- IP66

PLC-435M-IR2 (5MP)



- 1/2.5" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 20m IR
- IP66

PLC-422M-IR3 (2MP)



- 1/2.8" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 30m IR
- IP66

PLC-432M-IR2 (2MP)



- 1/2.5" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 20m IR
- IP66

FHD Cameras

Pro Series

PLC-328M-IR4/PR (8MP)



- 1/1.8" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 40m IR
- IP67

PLC-338M-IR2/PR (8MP)



- 1/1.8" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 20m IR
- IP67

PLC-325M-IR4/PR (5MP)



- 1/2.5" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 40m IR
- IP67

PLC-325P-IR2/PR (5MP)



- 1/2.5" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 20m IR
- IP66

PLC-335P-IR2/PR (5MP)



- 1/2.5" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 20m
- IP65

PLC-325P-IR5/PR-E (5MP)



- 1/2.7" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 50m IR
- IP67

PLC-325P-IR2/PR-E (5MP)



- 1/3" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 20m IR
- IP66

PLC-335P-IR2/PR-E (5MP)



- 1/2.5" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 20m
- IP66

PLC-322M-IR4/PR (2MP)



- 1/2.8" Full HD CMOS Sensor
- H.265/H.264
- 6 mm
- 40m IR
- IP67

IP Cameras

Pro Series

PLC-4212M-MZ-IR6/PR (12MP)



- 1/1.7" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- Motorized Lens 3.6mm - 11mm
- 60m IR
- IP67

PLC-4312M-MZ-IR4/PR (12MP)



- 1/1.7" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- Motorized Lens 3.6mm - 11mm
- 40m IR
- IP67

PLC-438M-MZ-IR4/PR (8MP)



- 1/1.8" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- Motorized Lens 3.6mm - 11mm
- 40m IR
- IP67

PLC-428M-IR4/PR (8MP)



- 1/2.5" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- 3.6mm Fixed Lens
- 40m IR
- IP67

PLC-438M-IR2/PR (8MP)



- 1/2.5" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- 2.8mm Fixed Lens
- 20m IR
- IP67

PLC-425M-MZ-IR6/PR (5MP)



- 1/2.8" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- Motorized Lens 2.7mm - 13.5mm
- 60m IR
- IP67

PLC-425M-IR8/PR (5MP)



- 1/2.8" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- 8mm Fixed Lens
- 80m IR
- IP67

PLC-425M-IR5/PR (5MP)



- 1/2.8" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- 3.6mm Fixed Lens
- 50m IR
- IP67

PLC-425M-IR3/PR (5MP)



- 1/2.8" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- 3.6mm Fixed Lens
- 30m IR
- IP67

PLC-435M-IR2/PR (5MP)



- 1/2.8" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- 2.8mm Fixed Lens
- 20m IR
- IP67

PLC-432MST-IR2/PR (2MP)



- 1/2.9" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- 2.8mm Fixed Lens Starlight
- 20m IR
- IP67

PLC-422MST-IR3/PR (2MP)



- 1/2.8" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- 3.6mm Fixed Lens Starlight
- 30m IR
- IP67

PLC-422M-IR3/PR (2MP)



- 1/2.9" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- 3.6mm Fixed Lens
- 30m IR
- IP67

PLC-432M-IR2/PR (2MP)



- 1/2.9" CMOS Sensor
- H.265+/H.265/H.264+/H.264
- 2.8mm Fixed Lens
- 20m IR
- IP67

PLC-422P-IR2/PR (2MP)



- 1/2.9" Full HD CMOS Sensor
- H.265/H.264
- 3.6mm Fixed Lens
- 20m IR
- IP66

PLC-432P-IR2/PR (2MP)



- 1/2.9" Full HD CMOS Sensor
- H.265/H.264
- 2.8mm Fixed Lens
- 20m IR
- IP66

FHD Cameras

Pro Series

PLC-322P-IR2/PR (2MP)



- 1/2.7" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 20m IR
- IP66

PLC-332P-IR2/PR (2MP)



- 1/2.7" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 20m IR
- IP65

FHD Cameras

Classic Series

PLC-325M-IR3 (5MP)



- 1/2.5" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 30m IR
- IP66

PLC-325P-IR2 (5MP)



- 1/2.5" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 20m IR
- IP66

PLC-335P-IR2 (5MP)



- 1/2.5" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 20m IR
- IP65

PLC-322M-IR3 (2MP)



- 1/2.9" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 30m IR
- IP66

PLC-322P-WR3 (2MP)



- 1/2.9" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 30m IR Full Color
- IP66

PLC-332P-WR3 (2MP)



- 1/2.9" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 30m IR Full Color
- IP66

PLC-322P-IR2 (2MP)



- 1/2.9" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 20m IR
- IP66

PLC-332P-IR2 (2MP)



- 1/2.9" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 20m IR
- IP65

PLC-321P-IR2 (1MP)



- 1/4" Full HD CMOS Sensor
- H.265/H.264
- 3.6 mm
- 20m IR
- IP66

PLC-331P-IR2 (1MP)



- 1/4" Full HD CMOS Sensor
- H.265/H.264
- 2.8 mm
- 20m IR
- IP65

Fisheye Cameras

Pro Series

PLC-4812M-IR2/PR (12MP)



- 1/1.7" CMOS Sensor
- H.265/H.264
- 20m IR
- PoE, SD Card Slot (Max. 128GB)
- 2-Way Audio
- Alarm In/Out
- IP65

PLC-484M-IR2/PR (4MP)



- 1/2.9" CMOS Sensor
- H.265/H.264
- 20m IR
- PoE, SD Card Slot (Max. 128GB)
- Wi-Fi, 2-Way Audio
- Alarm In/Out
- IP65

PLC-482M-IR2/PR (2MP)



- 1/3" CMOS Sensor
- H.264
- 20m IR
- PoE, SD Card Slot (Max. 128GB)
- Wi-Fi, 2-Way Audio
- Alarm In/Out
- IP65

NVRs

Pro Series

PLC-51264H8/PR



- 64 Channel Input
- 12MP Resolution
- ONVIF
- Output: 4K, HDMI and VGA
- H.265+/H.265/H.264+/H.264
- 8 SATA up to 48TB

PLC-5832/24 H2/PR - 4K



- 32/24 Channel Input
- 8MP Resolution
- ONVIF
- Output: 4K, HDMI and VGA
- H.265+/H.265/H.264+/H.264
- 2 SATA up to 12TB

PLC-5504/08/16 H1/PR



- 04/08/16 Channel Input
- 5MP Resolution
- ONVIF
- Output: HDMI and VGA
- H.265+/H.265/H.264+/H.264
- 1 SATA up to 6TB

NVRs

Classic Series

PLC-5532 H4



- 32 Channel Input
- 4 SATA
- 3G/4G, Wi-Fi (Optional)
- Plug & Play
- H.264/H.265
- P2P, Email, UPnP, DDNS, NTP, DHCP

PLC-5504/08/16 H1



- 4/8/16 Channel Input
- 1 SATA
- 3G/4G, Wi-Fi (Optional)
- Plug and Play
- H.264/H.265
- P2P, Email, UPnP, DDNS, NTP, DHCP

DVRs

Pro Series

PLC-1804/08/16H1/PR – 4K



- 04/08/16 Channels Input
- 8MP Supported
- AHD/TVI/CVI/IP
- H.265+/H.265
- Output: HDMI, VGA & CVBS
- 1 SATA upto 8TB

PLC-1532H8/PR



- 32 Channels Input
- 5MP Supported
- AHD/TVI/CVI/IP
- H.265+/H.265
- Output: HDMI, VGA & CVBS
- 8 SATA upto 64TB

PLC-1504/08/16H1/PR



- 04/08/16 Channel Input
- 5MP Supported
- AHD/CVI/TVI/IP
- H.265+
- Output: HDMI, VGA & CVBS
- 1 SATA up to 8TB

PLC-1504/08/16H1/PR-E



- 04/08/16 Channels Input
- 5MP Supported
- AHD/TVI/CVI/IP
- H.265+/H.265
- Output: HDMI, VGA & CVBS
- 1 SATA upto 8TB

PLC-1204/08/16H1/PR



- 04/08/16 Channels Input
- 2MP Supported
- AHD/TVI/CVI/IP
- H.265+/H.265
- Output: HDMI, VGA & CVBS
- 1 SATA upto 8TB

DVRs

Classic Series

PLC-1532 H2-E



- 32 Channel Input
- 5MP FHD Supported XVR
- TVI/AHD/DVR/NVR
- 3G/4G, Wi-Fi (Optional)
- H.264/H.265
- IP Cameras Supported
- 2 SATA Interface

PLC-1516 H2



- 16 Channel Input
- 5MP FHD Supported XVR
- TVI/AHD/DVR/NVR
- 3G/4G, Wi-Fi (Optional)
- H.264/H.265
- IP Cameras Supported
- 2 SATA Interface

PLC-1504/08 H1



- 04/08 Channel Input
- 5MP FHD Supported XVR
- TVI/AHD/DVR/NVR
- 3G/4G, Wi-Fi (Optional)
- H.264/H.265
- IP Cameras Supported
- 1 SATA Interface

PLC-1504/08/16 H1-E



- 04/08/16 Channel Input
- 5MP FHD Supported XVR
- TVI/AHD/DVR/NVR
- 3G/4G, Wi-Fi (Optional)
- H.265
- IP Cameras Supported
- 1 SATA Interface

Biometric Devices

FACE PRO



- 2,000 Face Capacity
- 10,000 Fingerprint Capacity
- 200,000 Log Capacity
- Verification Time <0.5(1:N)
- Battery Backup
- Wi-Fi (2.4G) (Optional)

FACE SLIM



- 1000 Face Capacity
- 10,000 Fingerprint Capacity
- 200,000 Log Capacity
- Verification time: < 0.5 second [1:N]
- Battery Backup
- Wi-Fi (2.4G) (Optional)

FACE SMART



- 1000 Face Capacity
- 10,000 Fingerprint Capacity
- 200,000 Log Capacity
- Verification Time <0.5(1:N)
- Battery Backup
- Wi-Fi (2.4G) (Optional)

BIOSLIM



- 2,000 Fingerprint Capacity
- 160,000 Log Capacity
- Verification Time <0.5(1:N)
- Battery Backup
- Wi-Fi (2.4G) (Optional)

Network Switches

PO1124GB-SFP



- 24 Ports Gigabit PoE
- 2 SFP + 2 Gigabit Uplinks
- Long Distance: 250m
- IEEE 802.3 af/at
- Rack Mount Brackets
- Power Capacity: 400W

PO1124MGB



- 24 Ports PoE
- 2 Gigabit Uplinks
- 52 Gbps Bandwidth
- IEEE 802.3 af/at
- Rack Mount Brackets
- Power Capacity: 350W

PO22108GB



- 8 Ports Gigabit PoE
- 2 Gigabit Uplinks
- Long Distance: 250m
- IEEE 802.3 af/at
- Fanless, Mini-Size
- Power Capacity: 120W

PO1116MGB



- 16 Ports PoE
- 2 Gigabit Uplinks
- Long Distance: 250m
- IEEE 802.3 af/at
- Fanless, Mini-size
- Power Capacity: 200W

PO1108MB



- 8 Ports PoE
- 2 Uplinks
- Long Distance: 250m
- IEEE 802.3 af/at
- Fanless, Mini-size
- Power Capacity: 120W

PO1104MB



- 4 Ports PoE
- 2 Uplinks
- Long Distance: 250m
- IEEE 802.3 af/at
- Fanless, Mini-size
- Power Capacity: 60W

Electric Locks

PLL-E100



- Door Exit Button
- IP65
- Max. Current: 3A
- Max. Voltage: DC 36V

Electric Locks

PLL-B100ST



- Standard Electric Bolt Lock
- Locked when Energized
- DC 12V
- Adjustable Locking Time

PLL-M100



- Electromagnetic Lock
- Locked when Energized
- DC 12V
- Adjustable Locking Time

PLL-B100GL



- Electric Bolt Lock for Glass Door
- Locked when Energized
- DC 12V
- Adjustable Locking Time


Barrier Gates

PLG-B1-S100



- Passing Speed: 40~60 people/min
- Sensor: 8 Pairs
- Passage Width: 60-90cm
- Housing: Stainless Steel (Hairline finish)
- Protection Grade: IP66

PLG-T660(6S)




- Motor Speed: 30r/min
- Remote Control Distance: <=30m
- Remote Control: 2pcs
- Rail Lifting Time: 3s
- Rail Length: <=4.5m

PLG-T9



- Automated Car Parking System
- Reading Cards: RFID, IC/ID, Barcode
- Storage Capacity: 10,000
- Communication: TCP/IP, RS485
- Environment: Indoor, Outdoor

PLG-5112



- Telescopic Arm Length: ≤280mm
- Passage Width: ≤600mm
- Protection Grade: IP54
- Operating Time: 0.8s
- Passing Speed: 35~40 people/min

PLG-5217




- Passing Speed: 25-40 people/min
- Reading Cards: IC/ID
- Passage Width: ≤600mm
- Communication Interface: TCP/IP
- Protection Grade: IP54

PLG-5219



- Passing Speed: 25-35 people/min
- Reading Cards: IC/ID
- Passage Width: ≤600mm
- Communication Interface: TCP/IP
- Protection Grade: IP54

PLG-5316



- Passing Speed: 35-45 people/min
- Swing Arm Length: ≤570mm
- Passage Width: ≤1100mm
- Housing Material: 304 Stainless Steel
- Protection Grade: IP44

Network Cable

PLN-UTP6-305P



- Transmission Data Capacity: 1000 Mbps
- Conductor: 23AWG Solid Bare Copper
- Standard Length: 90m
- Jacket Material: PVC
- Temperature Range: -20° to +70°C

PLC-UTP6-305C



- Transmission Data Capacity: 1000 Mbps
- Conductor: 24AWG CCA
- Standard Length: 90m
- Jacket Material: PVC
- Temperature Range: -20° to +70°C

Our Supporting Applications

PVMS 2020



- Desktop Application
- Add DVRs, NVRs & IP Cameras
- Local Recording
- Export Video
- PTZ Control

POLLO LIVE PRO



- Mobile Application
- Available for: iOS & Android
- Remote View
- Remote Playback
- PTZ Control

Pollo Pty Ltd. is an Australian Security Surveillance brand. We provide a wide spectrum of products and solutions for our global market, keeping in mind the best of our consumers' interest.

Product Line:

FHD & IP Cameras, DVRs & NVRs, Biometric Devices, EM Locks, Network Switches, Network Cables & Barrier Gates.



www.pollo.net.au

Sales: info@pollo.net.au
Technical Support: helpdesk@pollo.net.au

Disclaimer: All rights reserved, including final interpretation and content amendment.