




## PLC-428M-MZ3X-IR8/PR

3x Motorized Bullet 8MP

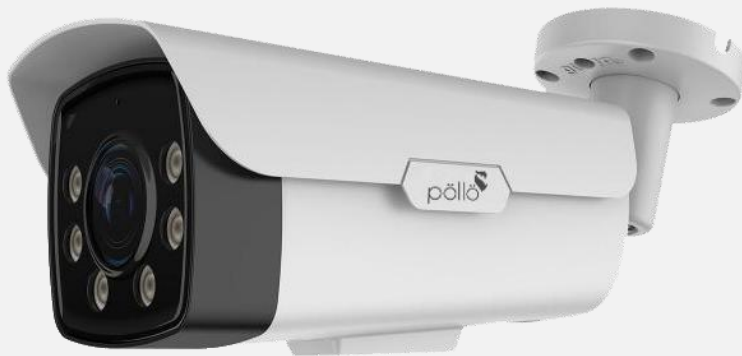

### **Pollo Pty Ltd.**

Address: Suite 401, 55 Phillips St. Parramatta, NSW 2150

Phone: 1300 6600 368

Email: [info@pollo.net.au](mailto:info@pollo.net.au)

Website: [www.pollo.net.au](http://www.pollo.net.au)



## PLC-428M-MZ3X-IR8/PR

### 3x Motorized Bullet 8MP



### Specifications:

<b>Model</b>	<b>PLC-428M-MZ3X-IR8/PR</b>
<b>Image Sensor</b>	1/1.8" OV High-resolution CMOS Sensor
<b>Resolution</b>	8MP
<b>Effective Pixels</b>	3840(H)*2160(V)
<b>Compression</b>	H.264/H.264+/H.265/H.265+/JPEG/AVI /MJPEG
<b>TV System</b>	PAL/NTSC
<b>Electronic Shutter Time</b>	Auto: PAL 1/25-1/10000Sec; NTSC 1/30-1/10000Sec
<b>Minimum Illumination</b>	0.01Lux
<b>S/N Ratio</b>	≥52dB
<b>Scanning System</b>	Progressive
<b>Video Output</b>	Network
<b>Reset Button</b>	Optional
<b>Focal Length</b>	3.6-11mm
<b>Focus Control</b>	Auto
<b>Lens Type</b>	Motorized
<b>Pixels</b>	8MP
<b>Infrared LED</b>	42μ x 6PCS
<b>Infrared Distance</b>	80M
<b>IR Status</b>	Auto Control
<b>IR Power On</b>	Smart, Manual & Timed mode
<b>Ethernet</b>	RJ-45 (10/100Base-T)
<b>Protocol</b>	TCP/IP,ICMP,HTTP,HTTPS,FTP,DHCP,DNS,DDNS,RTP,RTSP,RTCP,NTP,SMTP,UDP
<b>ONVIF</b>	Support ONVIF 2.4(Profile S/T)
<b>P2P</b>	YES, Support QR Code
<b>POE</b>	Internal, Support IEEE 802.3af
<b>Video Delay</b>	0.3S (Within the Lan)
<b>Main Stream 1</b>	3840*2160 @20fps 3072*2048@30fps
<b>Main Stream 2</b>	2592*1944@30fps 2560*1920@30fps

<b>Main Stream 3</b>	2560*1440@30fps 1920*1080@30fps 1280*720@30fps
<b>Sub Stream 1</b>	720*480@20fps 720*480@30fps
<b>Tri Stream</b>	352*288@20fps 352*288@30fps
<b>IE Brower</b>	IE8-11, Google Chrome, Firefox , Mac Safari
<b>Smart Phone</b>	iPhone, iPad, Android, Android Pad
<b>Day/Night</b>	Color/ B&W (IR-CUT )
<b>Image Config</b>	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, FLK(Flicker Control), Video Tampering, HLC, Distortion
<b>Corridor Pattern</b>	Support
<b>Defog Mode</b>	Support
<b>ROI</b>	Support
<b>BLC</b>	Support
<b>WDR</b>	HDR: 120dB
<b>Motion Detection</b>	Support
<b>Privacy Masking</b>	3 Rectangular Zone
<b>Recording Mode</b>	NVR/CMS/Web
<b>Language</b>	Chinese Simplified, Chinese Traditional, English, Bulgarian, Polish, Arabic, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian, Nederlands,Czech, Vietnamese
<b>Audio</b>	2-Way Audio
<b>Alarm</b>	1channel Input/Output
<b>SD Card Slot</b>	Optional, Support Max 512GB
<b>Housing</b>	Metal
<b>Ingress Protection</b>	IP67
<b>Anti-cut Bracket</b>	YES
<b>IR Cut Filter</b>	YES
<b>Operation Temperature</b>	-20°C ~ +60°C RH95% Max
<b>Storage Temperature</b>	-20°C ~ +60°C RH95% Max
<b>Power Source</b>	DC12V±10%, 1100mA
<b>Dimension</b>	220(W) x 109(H) x 106(D)mm
<b>Weight</b>	2150g

**Dimensions:**
