

pöllö 
Prime Series




2MP IP CAMERA

PLC-432M-AUK-IR3/PM

www.pollo.net.au

info@pollo.net.au


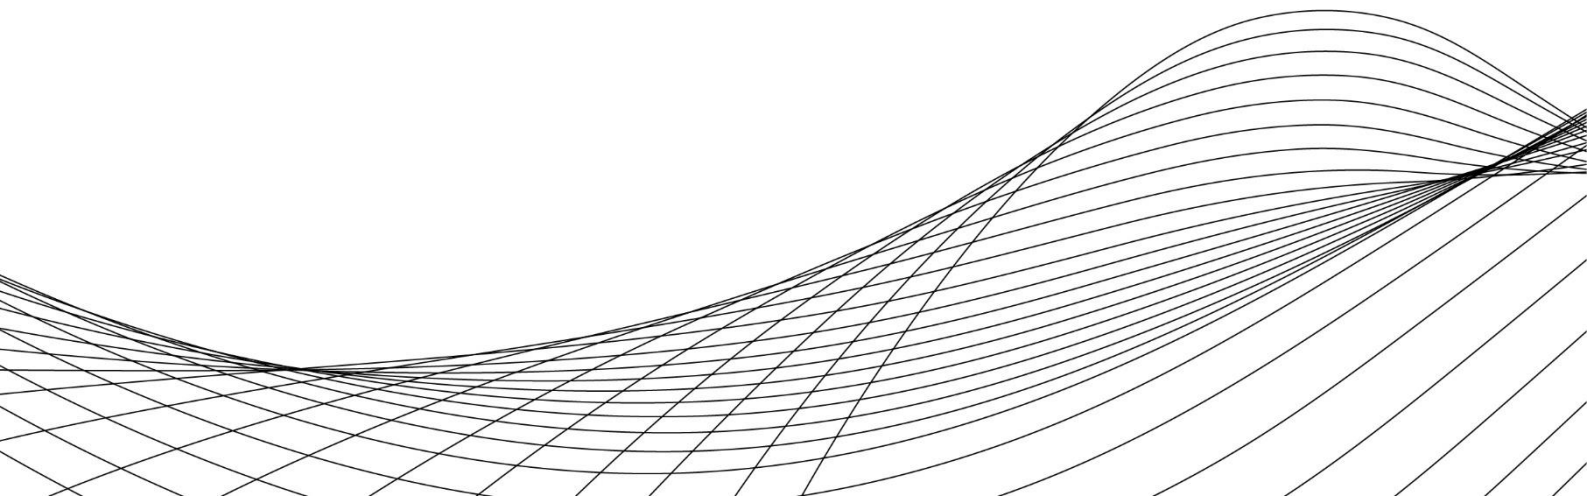


Key Features:

- ✔ H.265+ / H.265 / H.264+ / H.264 / MJPEG coding
- ✔ Max. resolution: 2MP (1920 × 1080)
- ✔ ICR auto switch, true day / night vision
- ✔ 3D DNR, WDR, HLC, BLC, smart IR, etc.
- ✔ 20~30m IR night view distance
- ✔ Built-in micro-SD card slot, up to 256GB
- ✔ 1CH audio input
- ✔ PoE power supply
- ✔ IP 67 & IK10 ingress protection
- ✔ Support dual streams
- ✔ Support remote monitoring by smart phones & tablet PCs with iOS and Android OS
- ✔ Intelligent analytics



Dimensions:

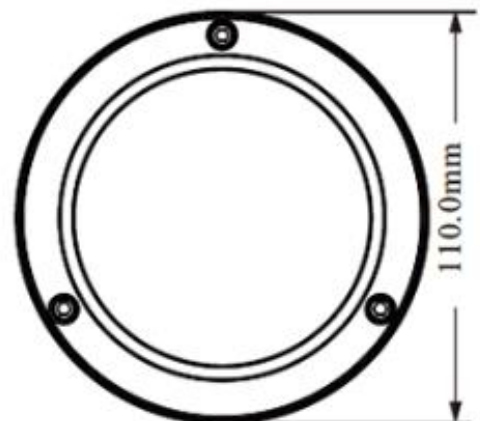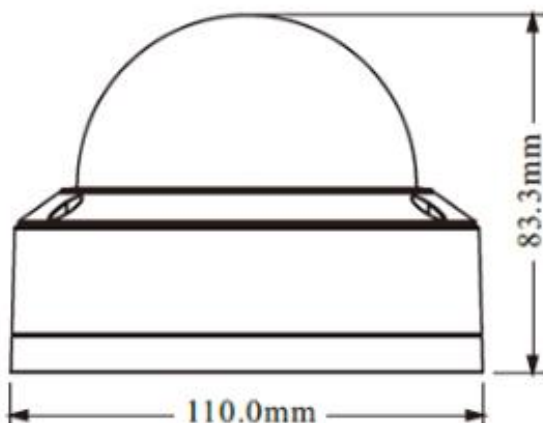

Specifications:

Model	PLC-432M-AUK-IR3/PM
Image Sensor	1 / 2.8 "CMOS
Image Size	1920×1080
Electronic Shutter	1/3s ~ 1 / 100000s
Iris Type	Fixed Iris
Min. Illumination	0.008 lux @F1.6, AGC ON; 0 lux with IR
Lens	2.8mm@F1.6, Horizontal FoV: 107°; Vertical FoV:56°; Diagonal FoV:126° 3.6mm@F1.6, Horizontal FoV:89°; Vertical FoV:47.5°; Diagonal FoV:104°
Focus	Fixed
Lens Mount	M12
Day & Night	ICR
Wide Dynamic Range	Digital WDR
BLC	Yes
HLC	Yes
Digital NR	Yes
Angle Adjustment	Pan: 0°~355°; Tilt: 0°~70°; Rotation: 0°~355°
Video Compression	Main stream: H.265+ / H.265 / H.264+ / H.264 Sub stream: H.265+ / H.265 / H.264+ / H.264/ MJPEG
H.265 Compression Standard	Main Profile@Leve4.1 High Tier
Resolution	1080P (1920 × 1080), 720P (1280 × 720), D1, CIF
Main Stream	60Hz: 1080P/720P(1~30fps); 50Hz: 1080P/720P(1~25fps)
Sub Stream	60Hz: D1/CIF (1~30fps);50Hz: D1/CIF (1~25fps)
Bit Rate	128 Kbps ~ 4 Mbps
Bit Rate Type	VBR / CBR
Image Settings	ROI, Saturation, Brightness, Hue, Contrast, Wide Dynamic, Sharpness, Image Mirror, Image Flip, NR, etc. adjustable through client software or web browser
ROI	Each ROI to be configured separately
Network	RJ45
Video Output	No
Audio	1CH audio input
Storage	Built-in micro-SD card slot, up to 256GB
Reset	No
Remote Monitoring	Web browser /PVMS Plus/Pollo Live Plus
Web Browser	IE (plug-in required)/Google Chrome/Edge/Firefox/Safari
Online Connection	Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Network Protocol	UDP, IPv4, IPv6, DHCP, NTP, RTSP, RTP, RTCP, PPPoE, DDNS, SMTP, FTP, 802.1x, SNMP, UPnP, HTTP, HTTPs, QoS
Interface Protocol	ONVIF
Storage	Network remote storage; micro-SD card storage
Smart Alarm	Motion detection, SD card full, SD card error

Smart Event	Video Exception (scene change, video blur and video cast detection), line crossing detection and region intrusion detection
General Function	Watermark, IP address filtering, video mask, heartbeat, illegal login lock,
PoE	Yes (IEEE802.3af)
IR Distance	20 ~ 30 m
Ingress Protection	IP67&IK10
Power Supply	DC12V/PoE
Power Consumption	< 3.5W
Operating Environment	- 30 °C ~ 60 °C (-22°F~140°F); Humidity: less than 95 % (non-condensing)
Storage Environment	- 30 °C ~ 65°C (-22°F~149°F), Humidity: less than 95 % (non-condensing)
Dimensions (mm)	Ø 110× 83.3
Weight (net)	Approx. 0.5KG
Installation	Ceiling mounting (Wall mounting available with the junction box and bracket)
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, WEEE(2012/19/EU) , directive 94/62/EC and REACH(EC1907/2006)