

pöllö 
Prime Series



Video Intercom Indoor Station

PLC-VD3200/PM

www.pollo.net.au


info@pollo.net.au

Key Features:



- ✔ 7 inch IPS touch screen
- ✔ A maximum of 6 indoor stations can be installed in the same room
- ✔ Support live preview of the linked camera
- ✔ Support snapshot when calling via door station (micro-SD card required)
- ✔ Support mute notification function
- ✔ Use the advanced noise suppression and echo cancellation technology to ensure high sound quality
- ✔ 8CH zone alarm access function
- ✔ Self-define door opening password
- ✔ Support 2.4G WIFI
- ✔ Support 1CH 12V200mA power output for powering up a sensor

Dimensions:

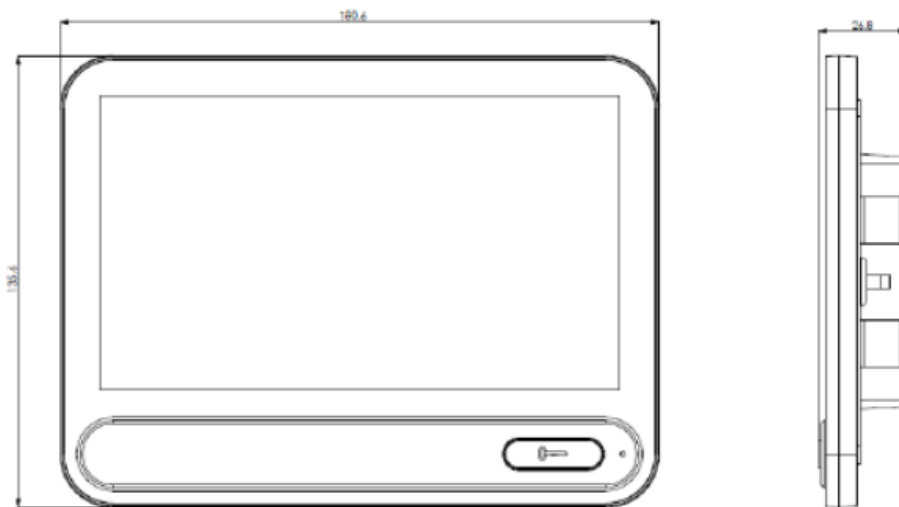

Specifications:

Model	PLC-VD3200/PM
Operating System	Linux
Display Screen	7-inch IPS touch screen
Display Resolution	1024 × 600, brightness:300 cd/m2
Operation Method	Capacitive touch screen
Video Input	Max. 4CH videos can be viewed simultaneously
Network Input Resolution	6MP/5MP/4MP/3MP/1080P/1280×1024/960P/720P/960H/D1/CIF
Compression	H.265+/H.265/ H.264 / MJPEG
Local Input	Built-in microphone
Local Output	Built-in speaker
Compression	G.711(U/A)
Resolution	Up to 2MP
Frame Rate	NTSC: 30fps; PAL:25fps
Simultaneous Playback	Max.1CH
Linked IPC	Max. 16 CH
Linked Indoor Extensions	Max. 5
Interface	RJ 45 100 Mbps self-adaptive Ethernet port × 1
Wireless Network	WiFi 802.11b/g/n
Protocol	TCP / IP, DHCP, DNS, NTP, etc.
Incoming/Outgoing Bandwidth	40/40Mbps
Audio	Built-in speaker and microphone, support noise suppression and echo cancellation
Storage	Built-in micro-SD card slot, up to 256GB
Reset	Yes
Alarm Input	8CH
Wi-Fi	Yes,2.4G Wi-Fi
Unlocking Button	Yes
RS 485	Reserved
Power Output	DC12V 200mA (only available when DC12V power supply is used)
Power	DC12V/POE
Power Consumption	< 6W
Dimensions(mm)	180.6 135.6 26.8
Weight (net)	Approx.0.36kg
Installation	Wall mounting
Working Environment	-20°C ~50°C, Humidity: less than 95% (non-condensing)
Certificate	CE, FCC
Environmental Protection	Complies with Directive EU RoHS, REACH and WEEE