


**55-inch LED-DID Splicing
Video Wall Unit (16:9)**

PLD-55PJ035P-LED-B

www.pollo.net.au

info@pollo.net.au

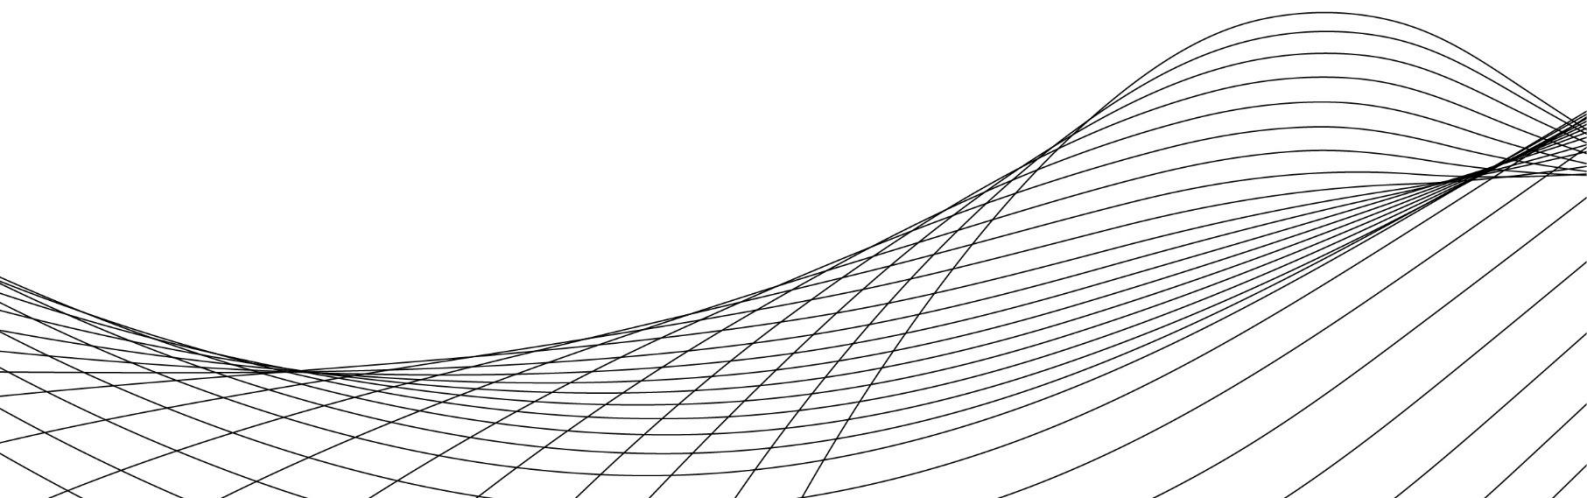


Key Features:

- ❖ Original DID Screen, high brightness, wide viewing, good stability.
- ❖ Embedded integrated splicing processors, good performance.
- ❖ Support 3D digital comb filter and MPEG digital image noise reduction, with high-definition graphics.
- ❖ 5ms short response time, images without trailing, 24/7 working time.
- ❖ Wide viewing angle 178°, and high-definition graphics seen from any angle.
- ❖ Unique technology S-PVA, Aspect Ratio 16:9;
- ❖ Hard coating(3H), Anti-glare treatment of the front polarizer (Haze 25%);
- ❖ Each screen's backlight brightness, colour and brightness can be consistent for a long time.



Standard Board Interface:

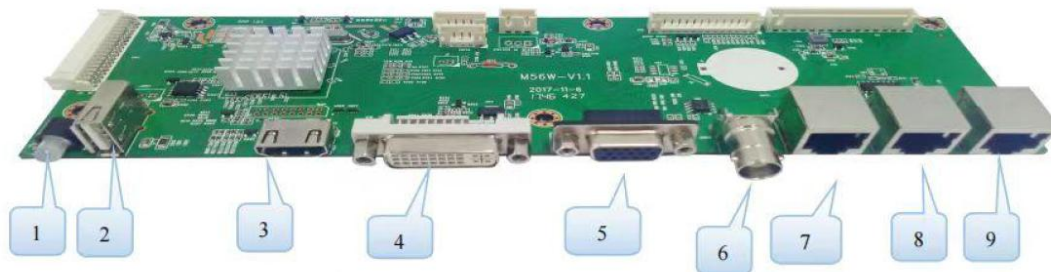

| NO | Description | | |
|----------|---------------|--|--|
| 1(D5) | Indication | | |
| 2(CN704) | USB | | |
| 3(P702) | HDMI in | | |
| 4(J5) | DVI in | | |
| 5(P701) | VGA in | | |
| 6(J1003) | CVBS video in | | |
| 7(CN703) | RS232 in | | |
| 8(CN12) | RS232 out | | |
| 9(CN13) | RS232 out | | |

Specifications:

| | |
|--|------------------------------------|
| Model | PLD-55PJ035P-LED-B |
| Screen Size | 55inch |
| Aspect Ratio | 16: 9 |
| Visible Size | 1210.5(W)×682(H) mm |
| Panel | TFT |
| Backlight | D-LED |
| Max resolution | 1920*1080 |
| Display Color | 16.7M |
| Brightness | 500cd/m ² |
| Contrast | 1200: 1 |
| Viewing Angle | H/V) 178°(H)/178°(V) |
| Response Time | 5ms |
| Seam | ≤3.5mm |
| Lamp Life | > 50000 Hours |
| DVI Input | 1ch DVI |
| HDMI Input | 1ch HDMI |
| USB Input | 1ch |
| VGA Input | 1ch |
| CVBS Input | 1ch |
| IR | 1 |
| RS232 Signal Control | 1CH Input, 2CH loop out |
| Color System | PAL/NTSC |
| Compatible HD/SD and HDMI Input | 400i/P, 576i/P, 720P, 1080i/1080P |
| 3D Comb Filter | Support |
| MPEG Noise Reduction | Support |
| Splicing | Multi-Screen |
| Matrix Joint Control | Support |
| AUTO Reproduction adjust | Support |
| Power Supply | AC 100~240V, 50/60Hz |
| Watt | 120W |
| Dimension | 1214mm*685.5mm*54mm(for reference) |

Dimension:

