



Face Slim

Face & Fingerprint



Pollo Pty Ltd.

Address: Suite 401, 55 Phillips St. Parramatta, NSW 2150

Phone: 1300 6600 368

Email: info@pollo.net.au

Website: www.pollo.net.au



Face Slim – Face & Fingerprint Time Attendance

PLF-S1000



Hot model PLF-S1000 is popular in the market with smart design, improved function that support WIFI, access control, bell, battery, RFID. Professional communication port with Wiegand in & out, 2 x relay, NC, NO, alarm, etc. Device with silicone keypad and ring bell. Data be managed via TCP/IP, Wi-Fi, and USB host port for data up / download to avoid the risk of accidental deletion, what's more, friendly software eTime with free.



High Power DSP



Communication




Trumpet

Specifications:

Biometric Measurement	Face & Fingerprint
Face Capacity	1,000
Fingerprint Capacity	10,000
Log Capacity	200,000
CPU	400 MHz
LCD Display	2.4" Touch Colour Screen 320 x 240 Pixels
Interface	TCP/IP, USB (Host and Slave), 2 × Relay, Wiegand (In & Out)
Language	English, Arabic, French, Korean, Spanish, Portuguese, etc.
Attendance Mode	Face + Fingerprint Face or Fingerprint or Password or Card, Card + Password or Fingerprint + Card + Password
Voice Instruction	16-bit Hi-Fi Voice & Sound Indication
Verification Time	<0.5 s [1: N]
FRR (False Rejection Rate)	<1%
FAR (False Acceptance Rate)	<0.0001%
Power Source	12 V DC/2 A
Operating Temperature	0°C - 45°C
Operating Humidity	<90% RH
Dimensions (mm)	147 x 175 x 62
Weight (kg)	0.3
Backup Battery	2 - 4 Hours for Working
Wi-Fi	2.4 GHz
OPTIONAL FUNCTIONS	
RF Card	12.5 kHz EM/13.56 MHz Mifare
Door Control	Door Control & Alarm

Accessories:


Application:

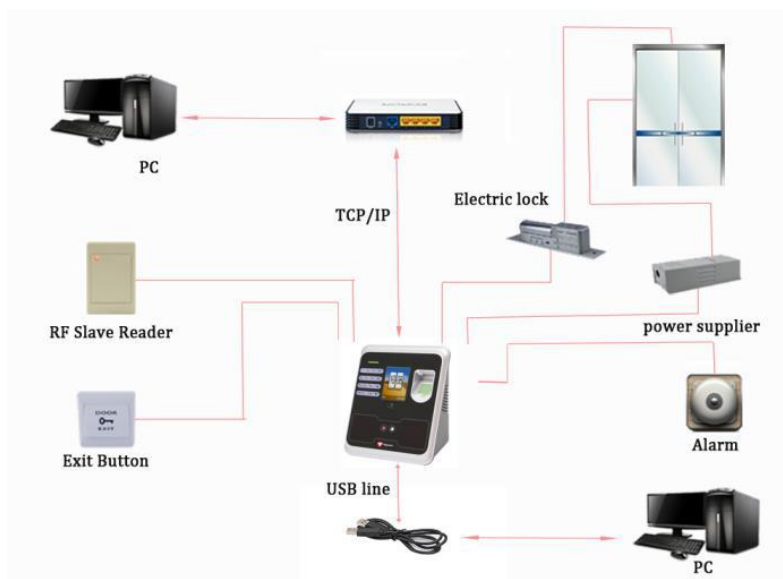

Interface:



- ALARM 0
- 485A
- WG00
- WG10
- D.Sensor
- Bell0
- NC
- COM
- GND
- 12V
- ALARM 1
- 485B
- WG01
- WG11
- PUSH
- Bell1
- NO
- GND
- 12V